


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04M 11/06	A1	(11) International Publication Number: WO 99/59325 (43) International Publication Date: 18 November 1999 (18.11.99)
<p>(21) International Application Number: PCT/US99/09765</p> <p>(22) International Filing Date: 4 May 1999 (04.05.99)</p> <p>(30) Priority Data: 09/074,896 8 May 1998 (08.05.98) US</p> <p>(71) Applicant: CONEXANT SYSTEMS, INC. [US/US]; 4311 Jamboree Road, Newport Beach, CA 92660-3095 (US).</p> <p>(72) Inventors: MATHE, Jacques; 20, impasse du Moulin de la Comtesse, F-22710 Penvenan (FR). PATER, Daniel, Jean; 269, chemin des Jasmins, F-06740 Chateau Neuf de Grasse (FR). D'ANGELO, Wilfred, C.; Les Azales, Chemin de l'arbre, F-06340 La Trinité (FR).</p> <p>(74) Agent: GESS, Albin, H.; Price, Gess & Ubell, Suite 250, 2100 S.E. Main Street, Irvine, CA 92614 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: DATA ACCESS ARRANGEMENT HAVING COMBINED REMOTE HANG-UP/RING DETECTION CIRCUITRY

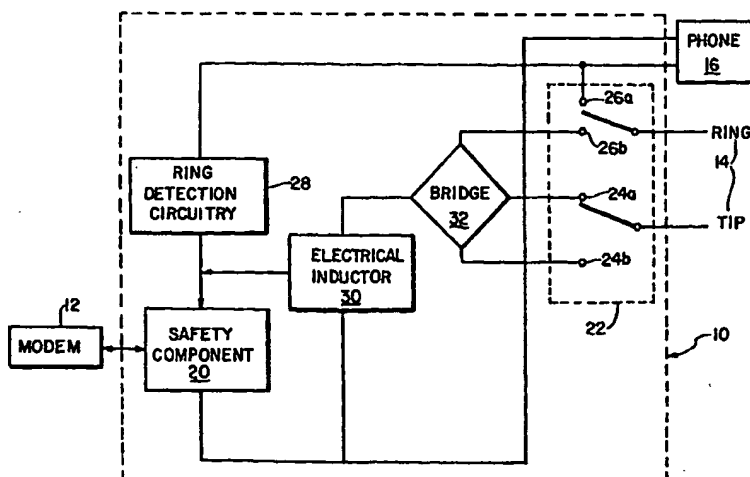

(57) Abstract

A data access arrangement (DAA) for interfacing a modem with a telephone line which requires only one safety barrier device for providing electrical isolation of the modem from the telephone line for both a ring detection signal and a remote device hang-up detection signal transmitted from the DAA to the modem. The DAA utilizes the same combined circuitry to transmit both the ring detection signal and the hang-up detection signal to the modem. The single safety barrier device is selectively connected to either ring detection circuitry during an On-Hook mode or remote hang-up detection circuitry during an Off-Hook mode by a selectively operating a relay switching device. With this arrangement, an improved DAA is provided having a combined circuit configuration for communicating ring detection information to the modem during the On-Hook phase and communicating remote hang-up detection information to the modem during an Off-Hook phase, thus minimizing the size, cost, and complexity of the DAA.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**DATA ACCESS ARRANGEMENT HAVING COMBINED
REMOTE HANG-UP/RING DETECTION CIRCUITRY**

BACKGROUND OF THE INVENTION

5

FIELD OF THE INVENTION

The present invention relates generally to an improved data access arrangement interfacing a modem with a telephone line, and specifically to a data access arrangement having a combined circuit configuration for performing both
10 remote hang-up detection and ring detection.

DESCRIPTION OF RELATED ART

In order to transmit digital data between computers over the public switched telephone network (PSTN), modems are used to convert between a computer's
15 digital signals and analog signals that can be carried on the telephone network's analog transmission lines. The subscriber portion of the telephone network (PSTN) has two wires known as "tip" and "ring," which carry information being transferred to and from the subscribers, as well as control signals, such as a ring signal. The modem receives a serial stream of bits as input from a computer and
20 produces a modulated carrier as output, thus converting the digital signals of the computer to analog signals for transmission on the telephone wires. Because modems connect to these conventional telephone wires, they must conform to the requirements of the telephone network (PSTN). A data access arrangement (DAA) is connected as an interface between the modem and the telephone network
25 (PSTN) to ensure the modem is compatible with the telephone network (PSTN).

Telephone companies require that a DAA be placed in series between the telephone wires and all equipment, such as modems, connected to the telephone network (PSTN) in order to isolate the equipment from the telephone network (PSTN). A DAA typically provides this electrical isolation between modems and
5 the telephone network (PSTN), as well as providing impedance matching, hybrid circuit and sometimes amplification, filtering and control functions. DAAs commonly utilize transformers or optical couplers as safety components to provide such electrical isolation.

All equipment connected to the telephone network (PSTN) is either in an
10 On Hook mode or Off Hook mode. During the On Hook phase, the equipment is not connected to other remote equipment through the telephone network (PSTN), and the equipment is awaiting a ring signal from a central office of the telephone network (PSTN). The DAA includes a ring detection circuit in order to detect when a ring signal is transmitted along the telephone wires, where the DAA then
15 notifies the connected modem of the detected ring signal. During the Off Hook phase, the equipment is connected to the central office of the telephone network (PSTN) for the purpose of establishing a connection with other remote equipment. A DAA may also include a DC detection circuit which monitors the DC current on the telephone line to detect when a remote device discontinues its connection with
20 the telephone line (e.g., hangs-up). The DAA then informs the connected modem of the remote device hang-up, so that the connected modem knows that the previous connection has been terminated and the modem can now establish a connection with another remote device. Since both the ring detection circuit and the DC detection circuit provide a connection between the modem and the
25 telephone network (PSTN), safety barriers, such as transformers or optical couplers, must be respectively positioned in series between each circuit and the modem to provide electrical isolation for all electrical pathways between the telephone network (PSTN) and the modem. Thus, current DAAs each include two

safety barriers, one for the ring detection circuit and another one for the DC detection circuit. In manufacturing DAAs, approximately 50% of the cost of producing a DAA comes from the cost of the safety barriers themselves.

5 There is a need for an improved DAA which utilizes a single safety barrier for providing electrical isolation between a modem and the telephone network (PSTN) for signals transmitted to the modem indicating both ring detection and remote hang-up detection in order to significantly reduce the cost, complexity, and size of the DAA.

10 SUMMARY OF THE INVENTION

The present invention overcomes the aforementioned shortcomings associated with the prior art by providing a data access arrangement for interfacing a modem with a telephone line which requires only one safety barrier device to provide electrical isolation of the modem from the telephone line for both a ring
15 detection signal and a remote device hang-up detection signal transmitted to the modem.

The data access arrangement of the present invention interfaces a modem with a telephone line using the same circuitry to transmit ring detection information from the telephone line to the modem as well as to transmit remote
20 device hang-up detection information to the modem. The single safety barrier device is selectively connected to either the ring detection circuitry during an On-Hook mode or the remote hang-up detection circuitry during an Off-Hook mode by a selectively operating a relay switching device. With this arrangement, an improved DAA is provided having a combined circuit configuration for
25 communicating ring detection information to the modem during the On-Hook phase and communicating remote hang-up detection information to the modem

during an Off Hook phase, thus minimizing the size, cost, and complexity of the DAA.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The features of the present invention, which are believed to be novel, are set forth with particularity in the appended claims. The present invention, both as to its organization and manner of operation, together with further advantages, may best be understood by reference to the following description, taken in connection with the accompanying drawings in which the reference numerals designate like parts
10 throughout the figures thereof and wherein:

 Figure 1 is a block schematic diagram of a DAA showing its interface between a modem and a telephone line.

 Figure 2 is a block schematic diagram of a preferred embodiment of the DAA of the present invention.

15

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

 The following description is provided to enable any person skilled in the art to make and use the invention and sets forth the best modes contemplated by the inventors of carrying out their invention. Various modifications, however, will
20 remain readily apparent to those skilled in the art, since the general principles of the present invention have been defined herein specifically to provide a data access arrangement (DAA) having a combined circuit configuration for performing both ring detection and remote hang-up detection.

 Referring now to FIG. 1, a block schematic diagram of a DAA
25 interfacing a modem 12 to the "tip" and "ring" wires of a telephone line 14 is illustrated. It should be understood that the term modem is used herein to encompass modems, facsimile machines, answering machines and other similar

telecommunication devices which require an interface to communicate information over a telephone line 14. The DAA 10 further includes the capability for connecting an ordinary voice telephone 16 to the telephone line 14.

The structure and operation of the DAA 10 of the present invention is described in greater detail with reference to the schematic block diagram of the DAA 10 in FIG. 2. The modem 12 is connected to the DAA 10 through a safety component 20. The safety component 20 provides electrical barrier isolation as well as communication between the modem 12 and the DAA 10. The safety component 20 preferably comprises an optical coupler, and will be referred to hereinafter as optical coupler 20. However, it is understood that safety component 20 may also comprise a transformer or other similar device providing the required electrical isolation between the modem 12 and the telephone line 14. The DAA 10 of the present invention is advantageous over prior DAA structures in that it only requires a single optical coupler 20 to transmit both ring detection signals and remote hang-up detection signals to the modem 12.

The modem 12 will either be in an On-Hook mode or an Off-Hook mode. The modem 12 is Off-Hook while it has established a connection with a remote modem (not shown) connected to the telephone network (PSTN), and the modem 12 is On-Hook while it is awaiting a ring signal to be transmitted from a remote modem. The DAA 10 includes a relay 22 which switches the connection of the DAA 10 to the tip and ring wires of the telephone line 14 between the On-Hook mode and the Off-Hook mode. Relay 22 may comprise any type of multiple-contact switch that allows its connection between the contacts to be easily switched, such as handset exclude switch. While in the On-Hook mode, relay 22 connects the tip/ring wires 14 to contacts 24a and 26a, respectively, to connect ring circuitry 28 to the telephone line 14. The DAA 10 can then detect the incoming ring signal by processing the ring voltage appearing across the tip/ring wires 14 using ring circuitry 28. Ring detection information is output by ring circuitry 28 to

optical coupler 20, where optical coupler 20 then transmits the ring detection information to the modem 12.

While in the Off-Hook mode, relay 22 connects the tip/ring wires 14 to contacts 24b and 26b, respectively, to connect an electrical inductor 30 to the telephone line 14. In the Off-Hook mode, the modem 12 is connected through the telephone line 14 to a remote modem (not shown). The DAA 10 is powered from the DC current flowing through the telephone line 14 from the telephone network (PSTN). The DC current flows through electrical inductor 30 where it is regulated and returned to the telephone network (PSTN) through the telephone line 14. The electrical inductor 30 performs DC current detection to monitor the DC current on the telephone line 14 in order to detect when the remote modem breaks its connection (i.e. hangs-up) with the telephone line 14. When the remote modem hangs-up, a sudden drop in the DC current on the telephone line 14 occurs. The electrical inductor 30 detects this change in the DC current on the telephone line and transmits a remote hang-up detection signal to optical coupler 20. Optical coupler 20 then transmits the remote hang-up detection signal to the modem 12, so that the modem 12 is aware that it is free to establish a connection with another remote modem.

Furthermore, electrical inductor 30 also detects when the DAA 10 has been disconnected from the telephone line 14 (i.e., removed from the telephone jack). When disconnected from the telephone line 14, no current will flow through electrical inductor 30, and the electrical inductor 30 will detect that no DC current is flowing from the telephone line 14 through the electrical inductor 30. Electrical inductor 30 will then provide a disconnection detection signal to optical coupler 20, which, in turn, transmits the disconnection detection signal to the modem 12, so that the modem 12 is aware that the DAA 10 has been disconnected from the telephone line 14. It is understood that other similar devices for performing DC current detection can be utilized in place of the electrical inductor 30.

A diode bridge 32 is positioned between the telephone line 14 and the electrical inductor 30 in order to full wave rectify the incoming signal from the telephone line 14. The inputs to the diode bridge 32 are connected to contacts 24b and 26b of relay 22, so that the diode bridge 32 is only connected to the telephone line 14 when the DAA is operating in the Off-Hook mode. While in the On-Hook mode, the incoming ring signal passes directly to ring circuitry 28 without requiring full wave rectification.

By forming the DAA 10 according to the above novel configuration, the outputs of both ring circuitry 28 and electrical inductor 30 are passed through only a single optical coupler 20 for transmission to the modem 12. Thus, only one electrical isolation barrier between the modem 12 and DAA 10 is required to transmit both ring detection information and remote device hang-up information from the DAA 10 to the modem 12.

As can be seen from the foregoing, a DAA formed in accordance with the present invention allows a single electrical isolation barrier device to be positioned between a modem and the ring detection circuitry and remote device hang-up detection circuitry of the DAA. Moreover, by forming a DAA having combined ring detection/remote device hang-up detection circuitry in accordance with the present invention, the cost, size, and complexity of the DAA can be significantly reduced by reducing the number of electrical isolation barrier devices required to be positioned between the DAA and a modem.

In each of the above embodiments, the schematic illustration of the DAA having combined ring detection/remote device hang-up detection circuitry of the present invention is described for a preferred embodiment of the DAA. However, it is the full intention of the inventors of the present invention that the DAA may be configured in other possible arrangements where the output from both the ring detection circuitry and remote device hang-up detection circuitry are passed through a single electrical isolation barrier when transmitted to a connected

modem. Those skilled in the art will appreciate that various adaptations and modifications of the just-described preferred embodiment can be configured without departing from the scope and spirit of the invention. Therefore, it is to be understood that, within the scope of the appended claims, the invention may be
5 practiced other than as specifically described herein.

CLAIMSWhat Is Claimed Is:

1. A data access arrangement for interfacing a data communications
5 device with a communication line and electrically isolating the data
communications device from the communication line, comprising:

an interface for connecting the data access arrangement to the
communication line;

10 a ring detection device connected to the interface for detecting when a ring
signal is transmitted over the communication line and outputting a ring detection
signal;

a remote hang-up detection device connected to the interface for detecting
when a remote data communications device connected to the data access
arrangement through the communication line breaks its connection from the
15 communication line and outputting a remote hang-up detection signal; and

an isolation device connected in a signal pathway between the data
communications device and the outputs of both the ring detection device and the
remote hang-up detection device for providing electrical barrier isolation between
the data communication device and the communication line.

20

2. The data access arrangement of claim 1, wherein the isolation device
is further configured for receiving the ring detection signal and the remote hang-up
detection signal and for transmitting these signals to the data communication
device.

25

3. The data access arrangement of claim 1, wherein the interface
connecting the data access arrangement to the communication line includes a

switching device for selectively switching the connection of the communication line between the ring detection device and the remote hang-up detection device.

4. The data access arrangement of claim 3, wherein a DC current signal
5 flows from the communication line and through the remote hang-up detection device, the remote hang-up detection device monitoring changes in the DC current signal to detect when the remote data communication device breaks its connection with the communication line.

10 5. The data access arrangement of claim 4, further comprising a rectifying device positioned between the switching device and the remote hang-up detection device for performing full wave rectification of the DC current signal transmitted from the communication line.

15 6. The data access arrangement of claim 4, wherein the remote hang-up detection device further detects whether the data access arrangement has been disconnected from the communication line by detecting when zero DC current is flowing through the remote hang-up detection device.

20 7. The data access arrangement of claim 1, wherein the remote hang-up detection device comprises an electrical inductor.

8. The data access arrangement of claim 1, wherein the isolation device comprises a single optical coupler.

25

9. A data access arrangement for interfacing a data communications device with a communication line and electrically isolating the data communications device from the communication line, the communication line having a DC current signal flowing there through, comprising:

5 an interface for connecting the data access arrangement to the communication line;

a ring detection device connected to the interface for detecting when a ring signal is transmitted over the communication line and outputting a ring detection signal;

10 a DC detection device to the interface for monitoring the DC current signal flowing from the communication line in order to detect changes in the communication abilities of the data communication device and outputting a communication state detection signal; and

15 an isolation device connected in a signal pathway between the data communications device and the outputs of both the ring detection device and the DC detection device for providing electrical barrier isolation between the data communication device and the communication line,

20 the isolation device further being configured for receiving the ring detection signal and the communication state detection signal and for transmitting these signals to the data communication device.

10. The data access arrangement of claim 9, wherein the communication state detection signal contains information indicating that the DC detection device has detected that a remote data communications device connected to the data
25 access arrangement through the communication line has broken its connection from the communication line.

11. The data access arrangement of claim 9, wherein the communication state detection signal contains information indicating that the DC detection device has detected that the data access arrangement has been disconnected from the communication line.

5

12. The data access arrangement of claim 9, wherein the interface connecting the data access arrangement to the communication line includes a switching device for selectively switching the connection of the communication line between the ring detection device and the DC detection device.

10

13. The data access arrangement of claim 12, further comprising a rectifying device positioned between the switching device and the DC detection device for performing full wave rectification of the DC current signal transmitted from the communication line.

15

14. The data access arrangement of claim 9, wherein the DC detection device comprises an electrical inductor.

15. The data access arrangement of claim 9, wherein the isolation device
20 comprises a single optical coupler.

16. A method for configuring a data access arrangement for interfacing a data communication device with a communication line using only a single isolation barrier for electrically isolating the data communication device from the
25 communication line, comprising the steps of:

providing a switching device connectable to the communication line for operatively switching the data access arrangement between an On-Hook mode and an Off-Hook mode;

operatively connecting a ring detection device to receive signals traveling
5 from the communication line when the data access arrangement is operating in the On-Hook mode;

outputting a ring detection signal to the single isolation barrier when the ring detection device detects that a ring signal has been transmitted over the communication line;

10 operatively connecting a remote hang-up detection device to receive signal traveling from the communication line when the data access arrangement is operating in the Off-Hook mode; and

outputting a remote hang-up detection signal to the single isolation barrier when the remote hang-up detection device detects that a remote data
15 communication device connected to the data access arrangement through the communication line has broken its connection with the communication line.

17. The method of configuring a data access arrangement of claim 16, further comprising the step of passing both the ring detection signal and the remote
20 hang-up detection signal through a single isolation barrier providing electrically isolation between the data communication device and the communication line and transmitting the signals to the data communication device.

18. The method of configuring a data access arrangement of claim 16,
25 further comprising the step of positioning a rectifying device between the switching device and the remote hang-up detection device for performing full

wave rectification of the signals transmitted from the communication line while the data access arrangement is operating in the Off-Hook mode.

19. The method of configuring a data access arrangement of claim 16,
5 the remote hang-up detection device detects that a remote data communications device has broken its connection from the communication line by monitoring changes in a DC current flowing through the communication line.

20. The method of configuring a data access arrangement of claim 16,
10 further comprising the steps of:

detecting whether the data access arrangement has been disconnected from the communication line and outputting a disconnection detection signal to the single isolation barrier when disconnection is found; and

15 transmitting the disconnection detection signal from the single isolation barrier to the data communication device.

21. The method of configuring a data access arrangement of claim 16, wherein the remote hang-up detection device comprises an electrical inductor.

20 22. The method of configuring a data access arrangement of claim 16, wherein the single isolation barrier comprises an optical coupler.

FIG. 1


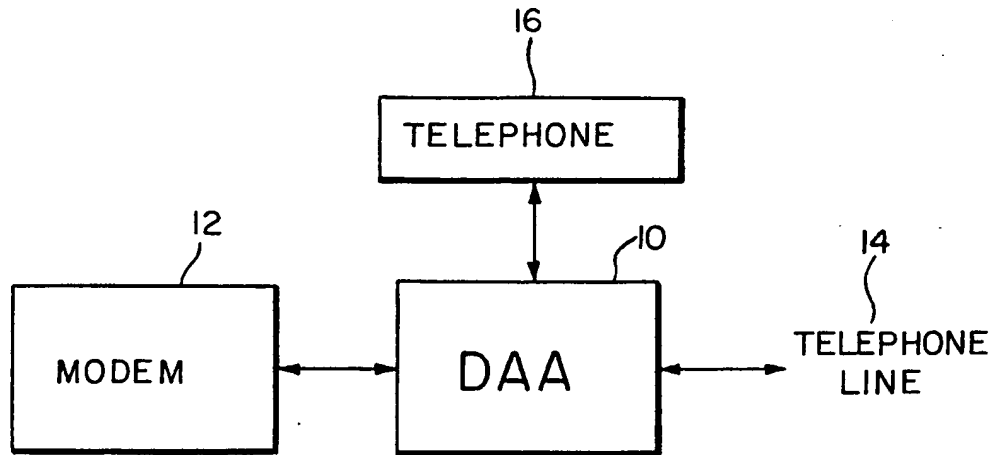


FIG. 2

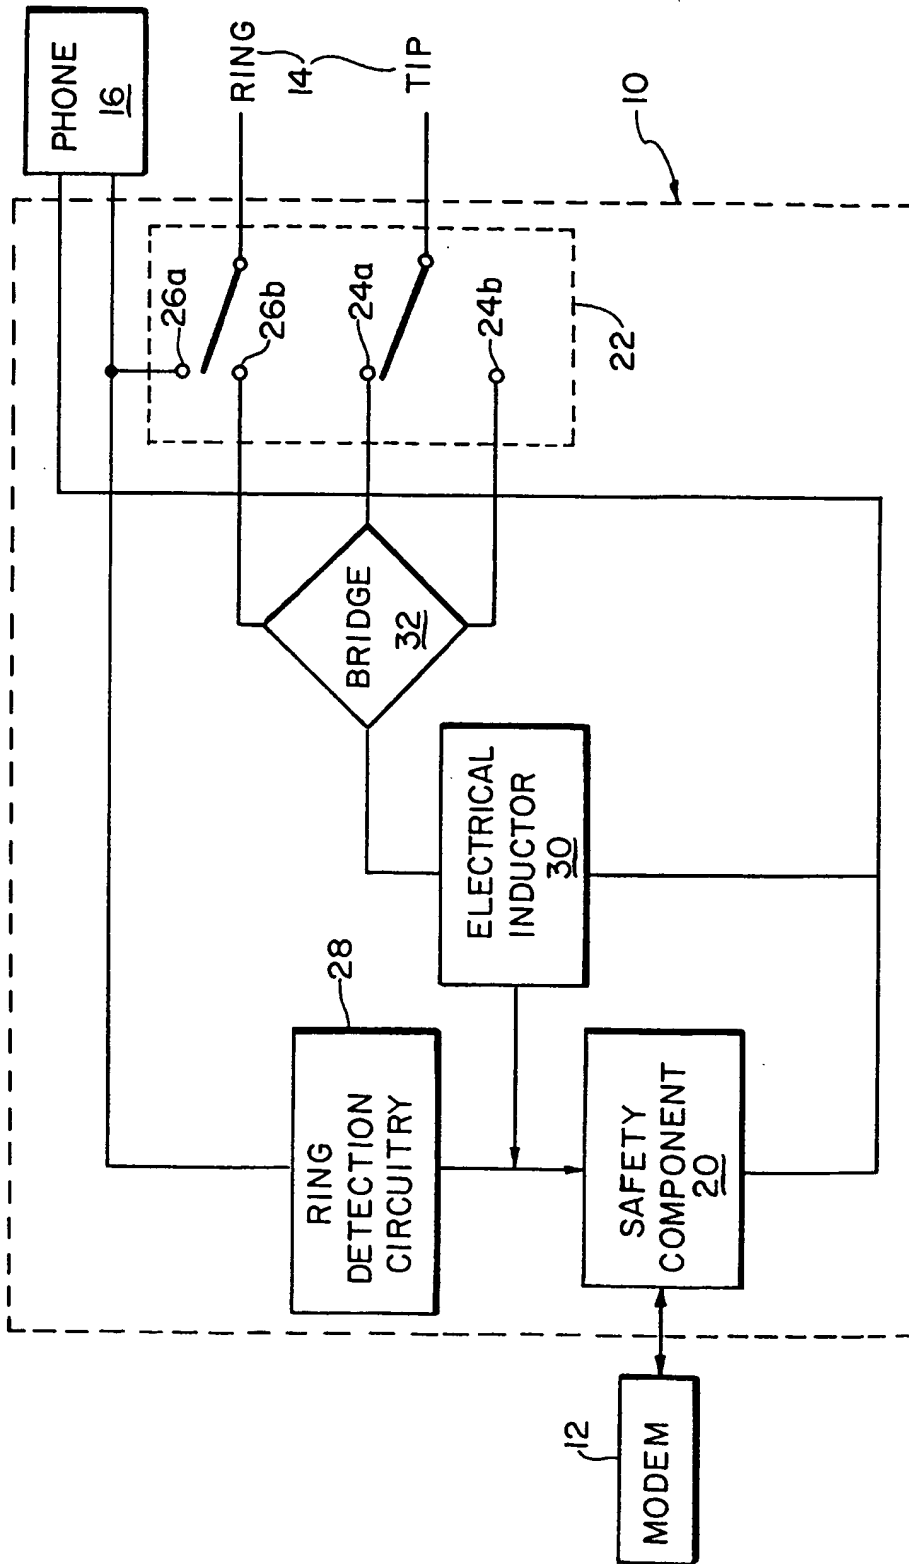

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/09765

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04M11/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 654 984 A (HERSHBARGER RUSSELL A ET AL) 5 August 1997 (1997-08-05)	1,2, 7-11, 14, 15
A	abstract column 9, line 60 - column 10, line 56 column 14, line 15 - line 30	3-6, 12, 13, 16-22
Y	US 5 600 715 A (BINGEL THOMAS J) 4 February 1997 (1997-02-04)	1,2, 7-11, 14, 15
A	page 2, line 39 - page 4, line 26	3-6, 12, 13, 16-22

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

7 September 1999

Date of mailing of the international search report

15/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mikkelsen, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/09765

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5654984 A	05-08-1997	JP 7307708 A	21-11-1995
US 5600715 A	04-02-1997	WO 9732429 A	04-09-1997